


NORFIX® V1500

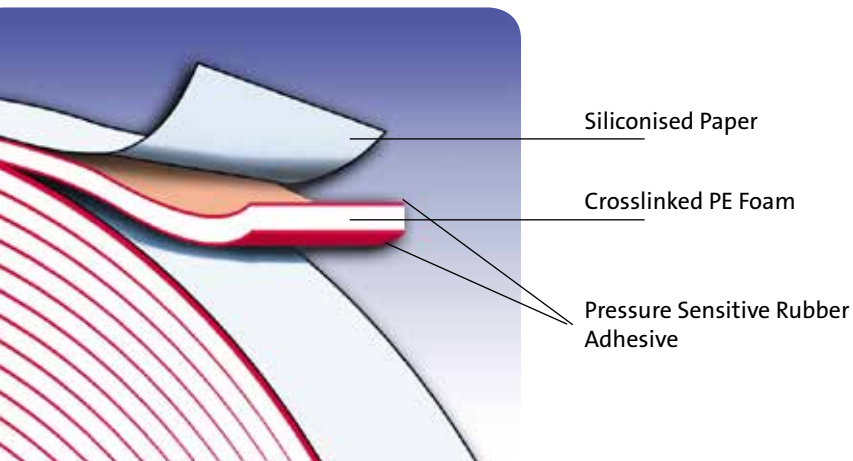

Multi Purpose PE foam mounting tape, with high shear rubber adhesive

Features / Benefits

- High cohesive strength adhesive giving excellent shear performance
- Conformable PE foam offering high elongation and internal strength
- Provides durability for permanent applications

Applications

- Interior or protected exterior use
- High load mounting applications
- Approval for BS7449 for mirror mounting

NORFIX® V1500

High tack, high shear rubber adhesive tape offering excellent adhesion performance. The product has been designed for internal applications or where the bond is not exposed to severe UV radiation. NORFIX® V1500 has been tested to BS7449 1991 and further literature is available to indicate recommended tape coverage.

The foam is a high quality Polyolefin with excellent dimensional tolerances and good elongation, with a high degree of colour stability and excellent key to the adhesive surface. The thickness and density range has been chosen to offer a conformable product for uneven, irregular or contoured materials.

The rubber adhesive has very high cohesive strength which produces very high bond strengths and very high load bearing capacity. The solvent based rubber adhesive has good tack and peel performance and in particular a high affinity for low energy surfaces such as PE.

The product is generally available as a white double sided tape, in thickness from 0.5 to 3.0 mm, protected by a siliconised glassine paper liner. Single sided products may be available upon request, subject to reasonable MOQs.



NORFIX® V1500 - Typical Properties

Colour :	White
Liner :	White/yellow galssine paper
Standard thicknesses :	0.5 to 3.0 mm
Useful width of log :	Minimum 1000mm
Format :	Jumbo logs, logs slit rolls (bespoke widths and lengths)

Properties	Test Method		Standard 0.8mm
Tensile strength, kPa	AFERA 4004	Typical	1200
Elongation at break, %	AFERA 4005	Typical	270
Water absorption, %		Maximum	1
180° Peel adhesion, N/cm	AFERA 4001	Typical	11
Dynamic shear, N/cm ²	AFERA 4024	Typical	70
Tensile adhesion, N/cm ²		Typical	70
Static shear adhesion, 5kg, hours	AFERA 4012	Minimum	5000
Service temperature, °C		Long term	-40 to +50

The product must be stored in its original packaging in a clean, dry, well ventilated area and under these conditions, the shelf life will be a minimum of 12 months.

To promote an adequate bond, the two surfaces must be clean and dry ; cleaning with a mixture of 50/50 water and IPA has been found to be adequate. Low temperatures at the time of applicaiton may increase the possibility of condensation on the surface, which will reduce the final bond strength.

The adhesive is pressure sensitive, we therefore recommend the application to be carried out at a minimum of 15°C with as high a pressure as your process allows (a minimum of 1 Bar pressure is recommended).

Saint-Gobain Performance Plastics

13 Earlstrees Road
Corby - Northants
NN17 4NP - UK

Phone: +44/1536 276000
Fax: +44/1536 203427

sggpl.chaineux@saint-gobain.com

Distributed by:

Norfix® is a registered trademark.



The data and details in this leaflet were correct and up-to-date at the time of printing and are intended to provide information on our products and their possible applications. It is the user's responsibility to make sure he is in possession of the latest version of the product data sheet. This leaflet is not a specification and does not assure specific product characteristics or make reference to the suitability of the products for a definite application. Because Saint-Gobain cannot anticipate or control every application, we strongly recommend testing of this product under individual application conditions. The application, the use and the conversion of this product are under the user's responsibility.